
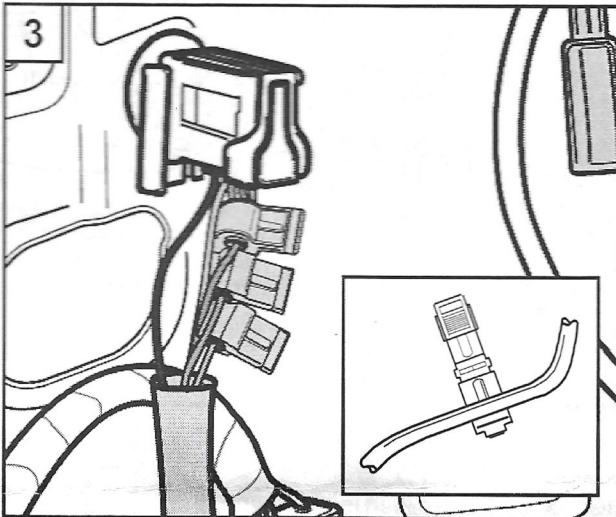


3. Connect wire taps to vehicle harness on driver side. Locate and identify the tail light (PINK), left turn signal (SKY BLUE), and stop wire (RED), behind the driver's side light. Attach a red T-tap to each of the indicated wires.


- (a) place wire into the center jaw of the wire T-Tap splice.
- (b) fold wire tap around wire.
- (c) Squeeze tightly together with pliers, making a secure connection.

4. Connect main harness spade terminals to wire taps (Use chart for reference).


**Tools Needed:**



VEHICLE HARNESS WIRE COLOR	CIRCUIT
PINK (4-WAY CONNECTOR)	TAIL LIGHT
RED (4-WAY CONNECTOR)	STOP
SKY BLUE (3-WAY CONNECTOR)	LEFT TURN

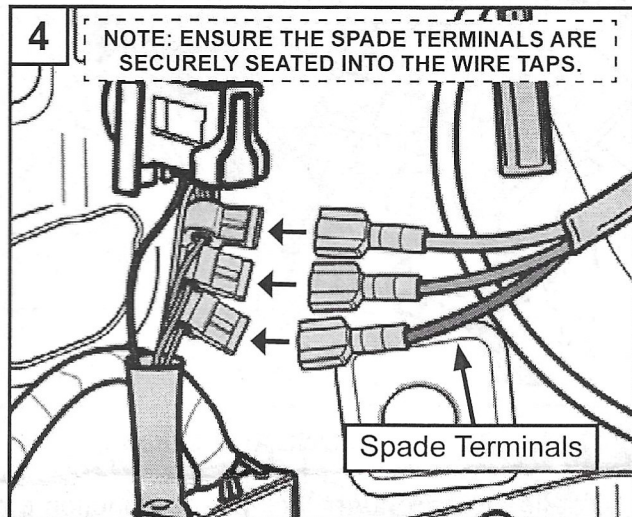

VEHICLE HARNESS WIRE COLOR	MAIN HARNESS WIRE
PINK (4-WAY CONNECTOR)	BROWN
RED (4-WAY CONNECTOR)	BLUE/BLACK
SKY BLUE (3-WAY CONNECTOR)	YELLOW

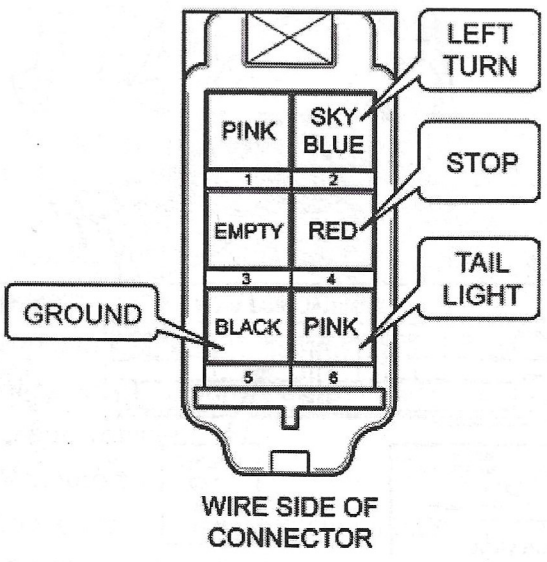

5. Plug the wire harness connection back in.

