


## AUXILIARY JACK/USB PORT/SD CARD SLOT HUB REMOVAL/INSTALLATION

id092000031500

1. Disconnect the negative battery cable. (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-D 2.2].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5].) (See NEGATIVE BATTERY CABLE DISCONNECTION/CONNECTION [SKYACTIV-G 2.0, SKYACTIV-G 2.5 (WITHOUT i-stop)].)
2. Remove the console-up. (See REAR CONSOLE REMOVAL/INSTALLATION.)
3. While pressing the tabs of the auxiliary jack/USB port/SD card slot hub in the direction of arrows (1) shown in the figure, move the auxiliary jack/USB port/SD card slot hub in the direction of arrow (2) and detach the tabs of the auxiliary jack/USB port/SD card slot hub from the console-up
4. Remove the auxiliary jack/USB port/SD card slot hub.
5. Install in the reverse order of removal.

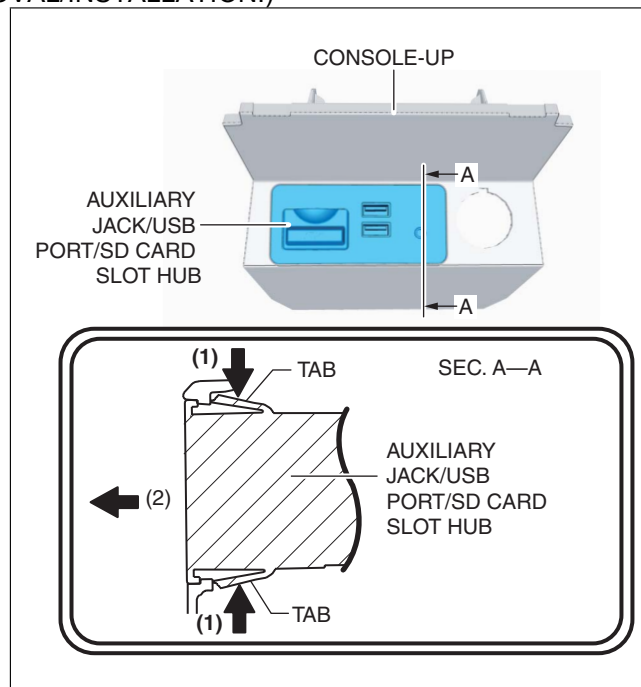

am6zzw00013568